

RamShield[®]

High Containment

MASH TL4 Compliant Thrie-Beam Barrier



SafeDirection
CRASH BARRIER SOLUTIONS

safedirection.com.au



Table of Contents

1.0	Introduction.....	5
2.0	Specifications	5
3.0	Material Traceability.....	6
4.0	How RamShield® HC Works	7
5.0	Crash Test Performance	8
6.0	RamShield® HC Crash Test Results.....	9
6.1	Barrier Deflection	11
6.2	Working Width.....	12
7.0	Design Considerations	13
7.1	Shy Line Offset.....	13
7.2	Flaring.....	13
7.3	Advance Grading	14
7.4	Clearance to Hazards.....	14
7.5	Proximity to Batter Hinge Points	14
7.6	System Installed Height.....	14
7.7	Transitioning to W-Beam	15
7.8	End Terminals	16
7.9	The Point-of-Need.....	17
7.10	Minimum Installation Length	18
7.11	Installation on Curves	18
8.0	RamShield® HC Component Identification	19
9.0	Tools Required	20
9.1	Recommended PPE	20
10.0	Site Establishment.....	20
10.1	Traffic Control.....	20
10.2	Underground Services	20
10.3	Overhead Obstructions.....	20
10.4	Unloading Exclusion Zone.....	20
11.0	RamShield® HC Installation	21
11.1	Set-Out.....	21
11.2	Post Installation.....	22
11.3	Attaching the Thrie-Beam Rails.....	23



12.0 Curving of Thrie-Beam Rails.....	24
13.0 Installation Tolerances.....	25
RamShield® HC Inspection Form.....	26
14.0 Maintenance	27
15.0 Repair.....	27
15.1 Removal of Damaged Posts.....	27
15.2 Removal of Damaged Rails.....	27





Leading Safety

Successfully crash tested to MASH Test Level 4

Complies with AS/NZS 3845.1:2015 Road safety barrier systems and devices

Safe vehicle containment and redirection

Low Deflection & Working Width

Shields roadside hazards close to the travelled way

Stable vehicle containment and redirection

Reduced distance between the barrier and a fixed hazard

Compatibility

Compatible with the MASH compliant SKT guardrail end terminal (MSKT)

Standard 2m post spacing

Same C-post profile as used in Australian public domain systems

Fast Assembly

Fewer parts

Simple rail to post bolt alignment

Stiff driving post

Narrow Geometry

Just 230mm system width



1.0 Introduction

RamShield® High Containment (HC) is the latest innovation and advancement in thrie-beam guardrail barrier designs. Developed by Safe Direction, RamShield® HC has been full-scale crash tested to MASH Test Level (TL) 4.

Thrie-beam guardrail is a stronger version of the w-beam guardrail systems. The additional corrugation in the rail combined with the higher mounting height, stiffens the barrier and improves its ability to contain larger vehicles.

RamShield® HC has advanced the containment level of public domain thrie-beam guardrail by introducing patented technology into the thrie-beam guardrail release mechanism. This results in a safer barrier design with fewer components allowing more metres of barrier to be deployed per public dollar to protect Australian motorists.

2.0 Specifications

Compliance:	MASH Test Level 3
	MASH Test Level 4
	AS/NZS 3845.1:2015
Standard post length:	1860mm
System width:	230mm
Standard post spacing:	2.0m centres
System Finish:	Hot dip galvanised to AS/NZS 4680

Compliance	Deflection	Working Width
MASH TL3	1.0m	1.1m
MASH TL4	1.1m	2.2m



3.0 Material Traceability

Safe Direction operates a quality management system, independently certified to the requirements of ISO 9001:2015.

A multi-stepped procedure is used by Safe Direction to verify the compliance of the material used in the production of RamShield® HC posts and thrie-beam guardrail to AS/NZS 1594.


Mill certificates and independent third-party laboratory test results are verified against Australian Standard guidelines recording the steel heat numbers, mechanical results and chemical composition.

Safe Direction product is then stamped during manufacture with a 4-digit number providing industry-leading traceability to the steel heat number. The format for stamping thrie-beam guardrails is:

Example: SD 9419 350 27

Where: SD = product from Safe Direction
9419 = the last 4 digits of the heat no.
350 = steel grade (i.e. HA 350)
27 = base metal thickness (i.e 2.7mm)



TEST CERTIFICATE		 BLUESCOPE STEEL											
CHEMICAL ANALYSIS													
Percentage of element by mass (L=Cast, P=Product, -S=Soluble, -T=Total, CF=Chemical Formula, n=Min, x=Max)													
Item No	Heat / Unit No	NATA Lab	L/P	C	P	Mn	Si	S	Ni	Cr	Mo	Cu	Al-T
0010	6709419	0632	L	.157	.019	.74	<.005	.015	.016	.035	.004	.042	.034
Item No	Heat / Unit No	NATA Lab	L/P	Ti	B-T	N	Nb	Sn	V	CF1	CF2	CF3	
0010	6709419	0632	L	<.002	<.0003	.0045	.001	.002	<.003	.29	.10	.00	
CF1=C+ (Mn/6) + ((Cr+Mo+V)/5) + ((Cu+Ni)/15) CF2=Ni + Cr + Cu + Mo CF3=Nb + Ti + V													
MECHANICAL TESTING													
Tensile AS 1391													
Item No	Heat No	Tested Unit	NATA Lab	Cat	Loc	THICK mm	ReH MPa	Rm MPa	Lo mm	ELONGN %			
0010	6709419	1H1F9690	0631	B	LQF	2.70	420	520	80	25			
0010	6709419	1H1F9845	0631	B	LQF	2.70	390	500	80	22			
ITEMS COVERED BY THIS CERTIFICATE													
Item No	Heat No	Ordered Dimensions (mm)	No of Units	Mass (Tonnes)	Unit Identifies								
0010	6709419	740.0X2.70XCOIL	6	24.030	1H1H9291AA 1H1H9291BA 1H1H9291CA 1H1H9291DA 1H1H9292AA 1H1H9292CA								



4.0 How RamShield® HC Works

RamShield® HC achieves a controlled redirection of errant vehicles by releasing the thrie-beam guardrail from the post at an optimal load to retain rail height, limit dynamic deflection and to allow the post to collapse without tripping the vehicle.


The separation of the rail from the post is achieved by a release tab incorporated into the post. The tab controls the release of the rail within the impact zone providing stable vehicle containment and redirection with minimal vehicle roll.

RamShield® HC uses standard thrie-beam guardrail and standard fasteners meaning there is minimal risk of inadvertent use of non-compliant items.

Upon release of the thrie-beam rail, the C-posts collapse upon impact yielding proximate to the ground surface. This release and collapse mechanism makes RamShield® HC suitable for use in stiff soils and deep asphalt applications.

The sectional strength of the C-post limits barrier deflection, an important design consideration when shielding roadside hazards.

The working mechanism of RamShield® HC is a patented concept designed and developed by Safe Direction. The concept is the latest innovation in thrie-beam guardrail designs and sets a new benchmark in simplicity and performance.

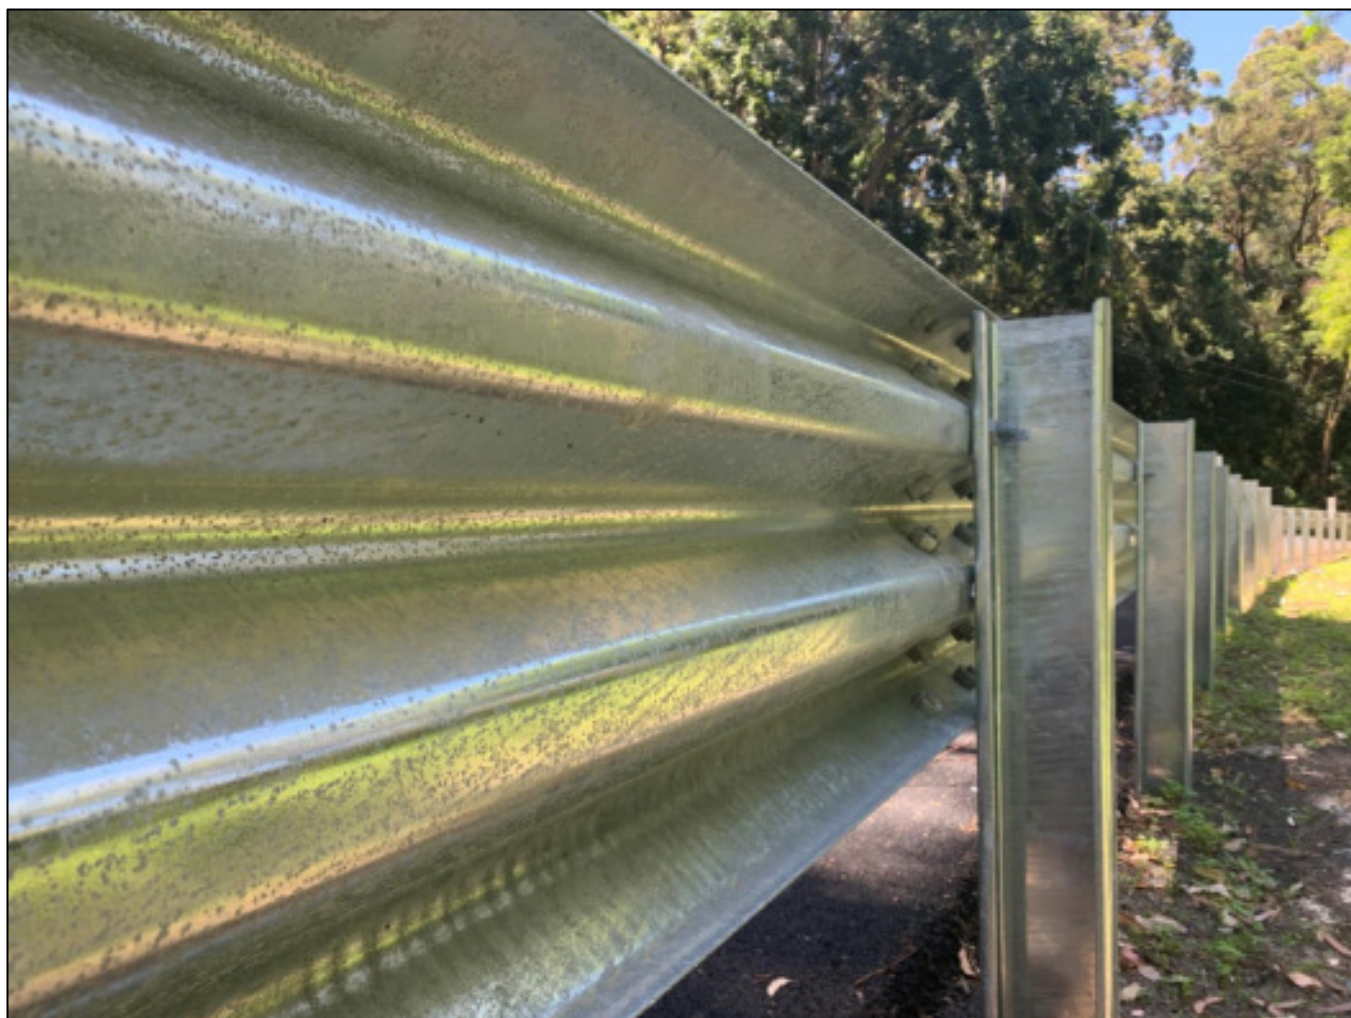



5.0 Crash Test Performance

RamShield® HC has been fully crash tested and evaluated according to the specifications for Test Level 4 (TL4) of the AASHTO Manual for Assessing Safety Hardware (MASH). The MASH specification is an update to and supersedes NCHRP Report 350 for the purposes of evaluating new safety hardware devices.

MASH is also the basis of testing procedures for road safety systems as stated in *AS/NZS 3845.1: 2015 Road Safety Barrier System and Devices*.

The introduction of MASH follows changes to the vehicle fleet, researching of real-life impact conditions and updated criteria for evaluating barrier performance.




The MASH TL4 crash test matrix requires the following impacts:

- 10,000kg rigid truck travelling at 90km/h and 15°;
- 2270kg pick-up truck travelling at 100km/h and 25°, and
- 1100kg passenger car travelling at 100km/h and 25°.





6.0 RamShield® HC Crash Test Results

Vehicle Type	Impact Condition	Impact Energy	Barrier Deflection	Working Width
	1100kg small car travelling at 100km/h and 25 degrees	75.8 kJ	0.8m	1.0m
	2270kg pick-up truck travelling at 100km/h and 25 degrees	156.4 kJ	1.0m	1.1m
	10,000kg rigid truck travelling at 90km/h and 15 degrees	209.3 kJ	1.1m	2.2m



1100kg car at 100km/h and 25°
Deflection: 0.8m
Working Width: 1.0m



2270kg pick-up at 100km/h and 25°
Deflection: 1.0m
Working Width: 1.1m



10,000kg truck at 90km/h and 15°
Deflection: 1.1m
Working Width: 2.2m

6.1 Barrier Deflection

Dynamic deflection is the maximum lateral displacement of the barrier during a vehicle impact. When a vehicle strikes a barrier, the dynamic deflection varies according to the characteristics of the impacting vehicle, including vehicle mass, impact speed, angle of impact and the characteristics of the barrier system.

Sufficient dynamic clearance should be provided between the face of a barrier and a hazard to accommodate the appropriate dynamic deflection. The crash test deflection results of RamShield® HC provide a linear relationship between impact energy and dynamic deflection indicating predictable barrier behaviour

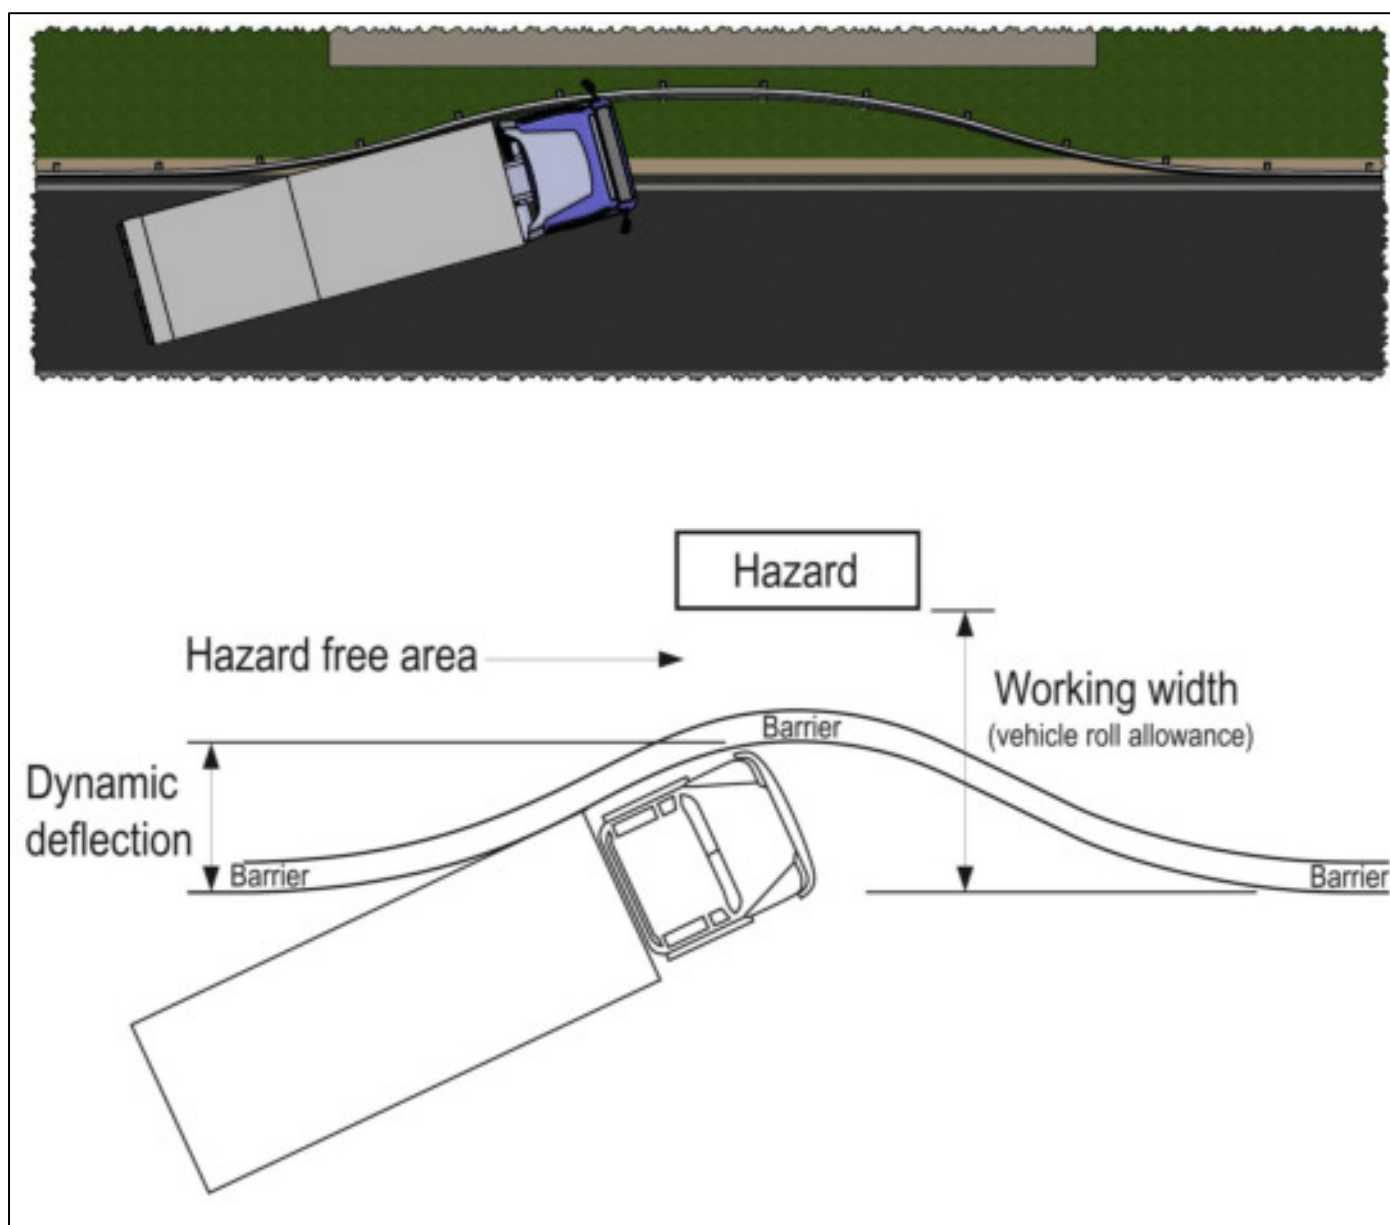


Figure 1: Dynamic Deflection Terminology

6.2 Working Width

The working width is the minimum distance required to prevent an impacting design vehicle from colliding with an object behind a barrier system. This includes both the dynamic deflection of the barrier and the extra width to allow for the roll (vertical rotation) of an impacting vehicle.

Working width is an important design consideration when shielding above-ground fixed hazards such as trees, sign supports or bridge piers.

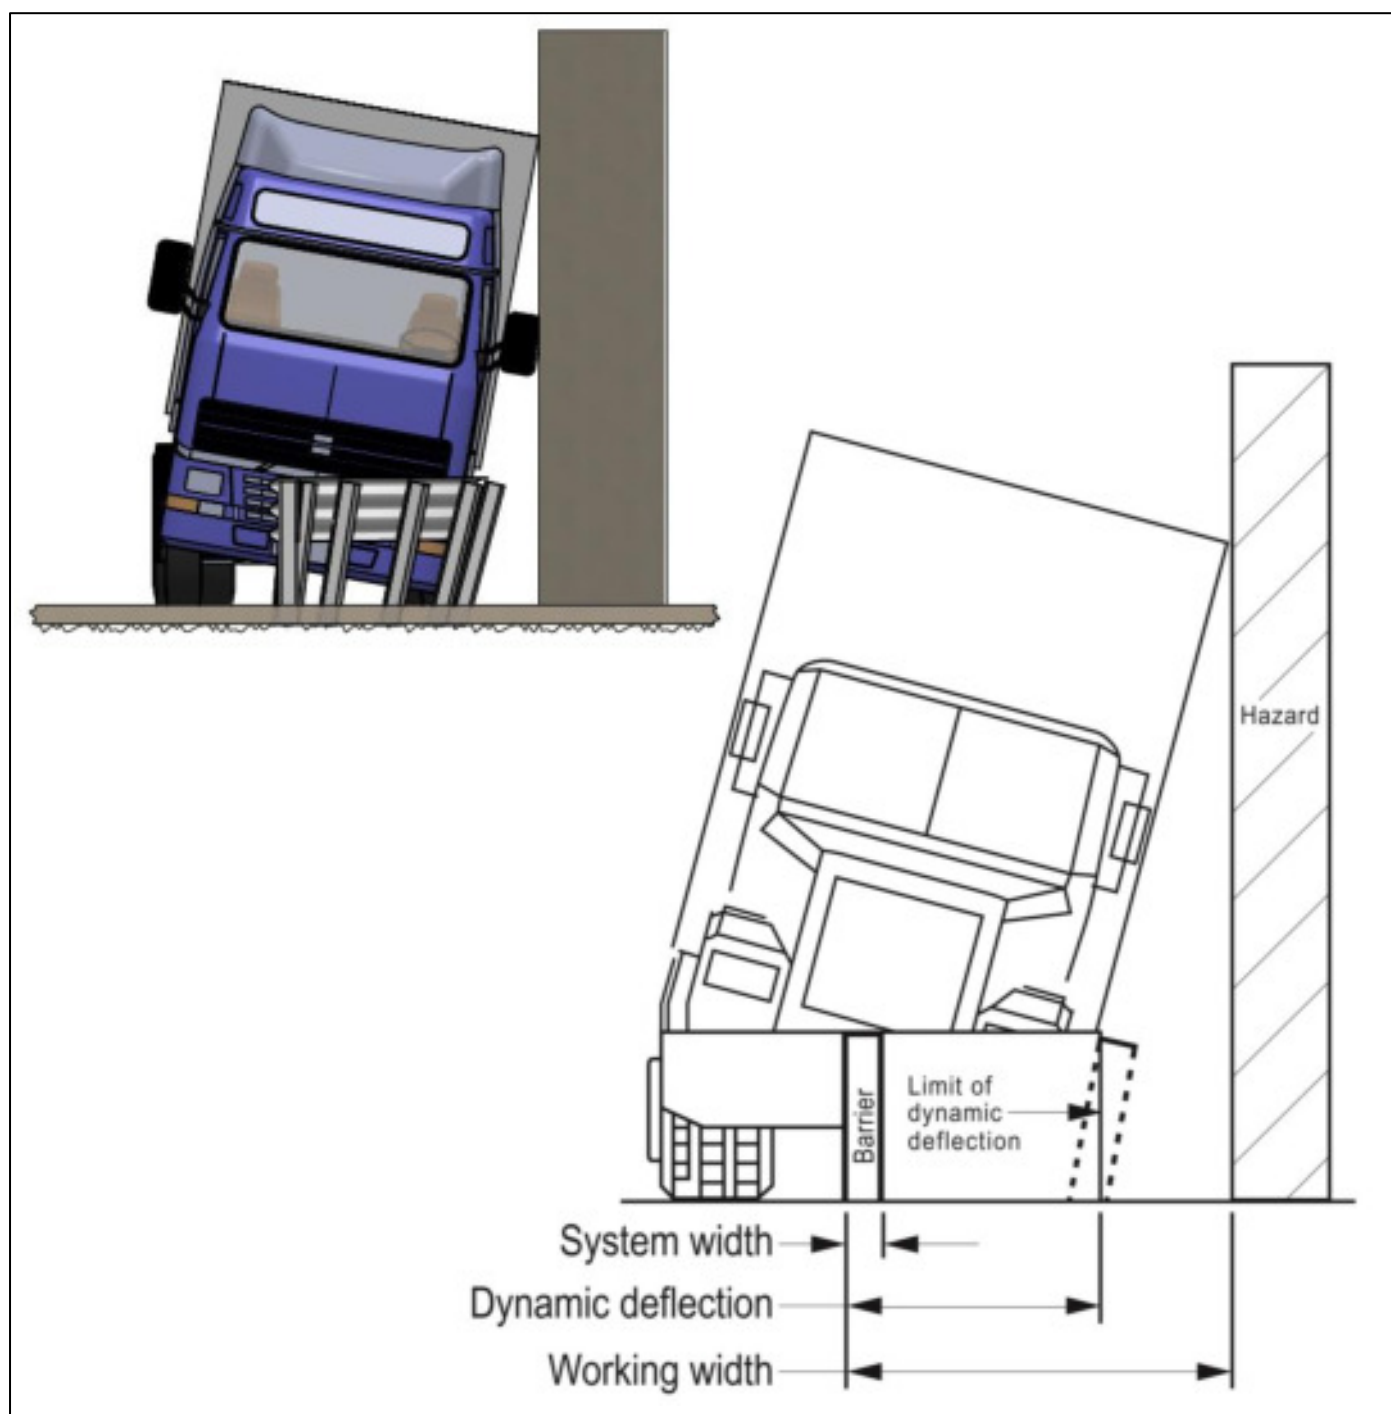


Figure 2: Working Width Terminology

7.0 Design Considerations

7.1 Shy Line Offset

When safety barriers are located too close to traffic, drivers in the adjacent traffic lane tend to reduce speed, drive off-centre in the lane, or move into another lane.

Generally, there should be uniform clearance between traffic and roadside features. Uniform alignment enhances road safety by providing the driver with a certain level of expectation, thus reducing driver concern for and reaction to the roadside features.

The distance from the edge of the traffic lane beyond which a roadside feature will not be perceived as an obstacle and result in motorists reducing speed or changing lanes on the road is called the shy-line offset.

Where long continuous lengths of barrier are used, this shy-line effect is not so critical, especially if the commencement of the barrier can be gradually transitioned from beyond the shy-line.

Recommendations for the shy line offset are contained in Table 1.

Table 1: Shy Line Offset

Design Speed (km/h)	Shy Line Offset (m)
50	1.1
60	1.4
70	1.7
80	2.0
90	2.2
100	2.4
110	2.8

Source: Austroads Guide to Road Design Part 6

7.2 Flaring

Motorists are less likely to perceive roadside barriers to be a hazard if the barrier is introduced gradually to the roadside environment through the use of a 'flare'. The flare rate is the ratio of the length of the flared part of the barrier (measured parallel to the road) to the barrier offset.

Flaring the safety barrier system provides the following benefits;

- The end terminals can be positioned further from the travelled path reducing the potential for a head-on impact;
- The shy line effects where a hazard is close to the travelled path is minimised; and
- Flaring provides a gradual transition to a major hazard close to the roadway (such as a bridge parapet or railing).

The maximum flare rates that should be used on an approach to a road safety barrier are shown in Table 2. Following the guidelines of Table 2 ensures that the flare does not significantly increase the opportunity for high-angle impacts with the barrier.

Table 2: Flare Rate

Design Speed (km/h)	Flare Rate (within Shy Line Offset)	Flare Rate (outside Shy Line Offset)
50	13:1	7:1
60	16:1	8:1
70	18:1	10:1
80	21:1	11:1
90	24:1	12:1
100	26:1	14:1
110	30:1	15:1

Source: Austroads Guide to Road Design Part 6

The flare rate for end terminals may vary from those contained in Table 2. Please refer to specific Product Guides for allowable flare rates for end terminals.

7.3 Advance Grading

It is recommended that the area in advance of RamShield® HC be limited to a grading of 10H:1V to ensure that the vehicle's suspension is neither extended nor compressed at the moment of impact with the barrier.

7.4 Clearance to Hazards

Road safety barriers should be installed with sufficient clearance behind the barrier to allow for the expected deflection of the system and any vehicle roll (working width).

The impact performance of a barrier will be dependent upon vehicle mass, speed and angle of impact. The crash test conditions are designed to represent real-life 'worst case impact scenario'.

7.5 Proximity to Batter Hinge Points

Space in the road corridor is premium. In an effort to maximise space for other infrastructure and landscaping, the proximity of the post to the batter hinge point is often reduced during the design process, without evidence or justification through crash testing.

Best practice ensures that the vehicle remains on the verge, that there is no damage to the batter following an impact and that the embankment provides adequate support to resist the impact loads.

The Austroads Safety Barrier Assessment Panel's preference is for the distance to the hinge point be sufficient to accommodate the barrier's design deflection and provide adequate lateral support for the system.

On constrained sites, please consult with Safe Direction for guidance on minimum distances and post embedment depth, noting that recommendations need to consider available distance to the hinge point, soil conditions and batter slope.

7.6 System Installed Height

RamShield® HC has been crash tested with the top of the thrie-beam guardrail 1000mm above ground level.

The thrie-beam guardrail is positioned approximately 30mm above the top of post. This is an important design consideration for vulnerable road users.

The post mounting slot provides 45mm of height adjustment. The tolerance on system height is ± 20 mm.

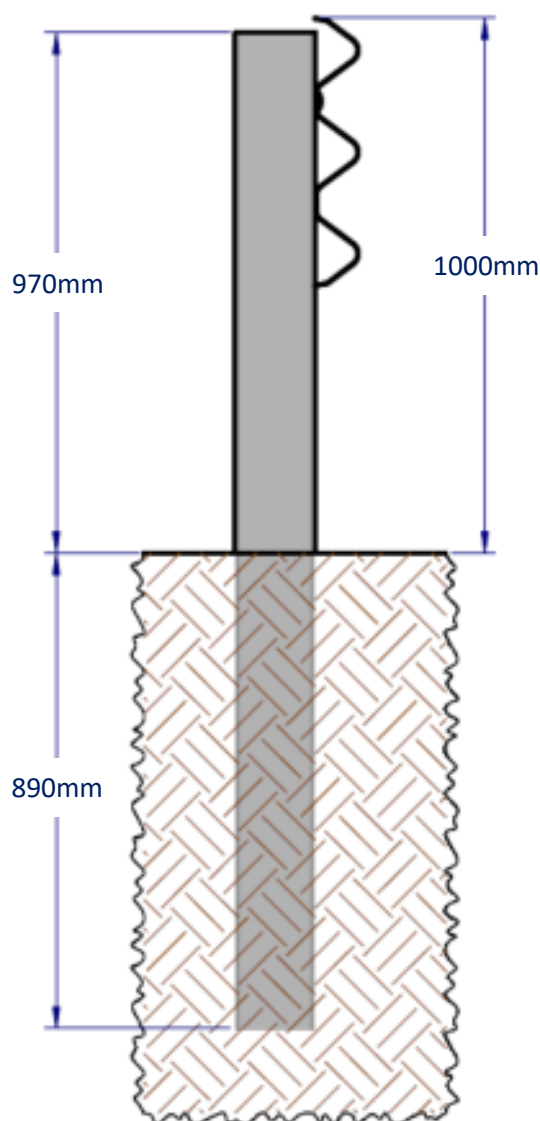


Figure 3: RamShield® HC Post Embedment Depth

7.7 Transitioning to W-Beam

The use of an asymmetric transition is required to transition from thrie-beam to w-beam guardrail. The asymmetric transition panel is 1905mm long (nett laying length) and is available as an approach or departure configuration (viewed from the road centreline).

The asymmetric transition lowers the height to top of the rail by 200mm, making it compatible for use with RamShield® w-beam guardrail and MSKT terminals, which are installed with a rail height of 800mm above ground level.

The w-beam end of the asymmetric transition can be connected directly to RamShield® w-beam guardrail or an MSKT Terminal.

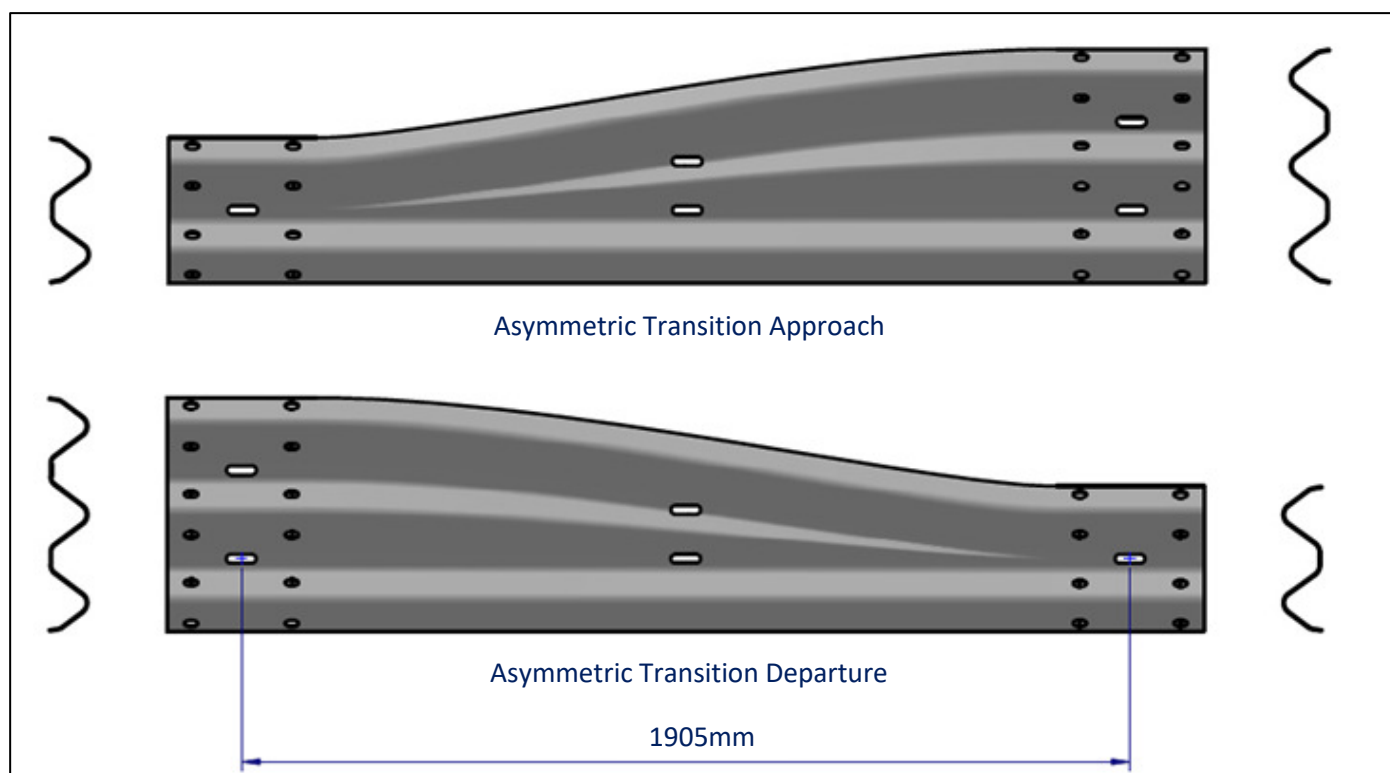


Figure 4: Asymmetric Transitions



7.8 End Terminals

End terminals are designed to anchor the safety barrier system and introduce the necessary tensile and flexural strength required for safe vehicle containment and re-direction throughout the length-of-need section. They also provide the additional feature of reducing the severity of an impact near or at the end of the system.

Guardrail end terminals are installed using w-beam guardrail, therefore it is necessary to transition from thrie-beam using an asymmetric transition before commencing installation of an end terminal. Thrie-beam cannot be used within the guardrail terminal section.

The MASH compliant SKT (MSKT) is an energy-absorbing tangential end terminal, designed to minimise the severity of impacts occurring at the end of the safety barrier system.

It is recommended that RamShield® HC be anchored at the leading and trailing end of the installation with MSKT terminals.

The MSKT terminal can connect directly to the asymmetric transition.

Note: The upper limit for the crash test assessment of guardrail end terminals is MASH Test Level 3.



7.9 The Point-of-Need

The point-of-need is the location along the barrier system where containment and redirection of errant vehicles commences. The distance between the leading and trailing points of need is referred to as the length of need.

Where the test level of a barrier is determined by the level of performance required for a specific hazard, the same level of performance should be provided over the whole length of need associated with that hazard. For example, where a hazard requires a MASH TL4 barrier, a barrier successfully tested to TL4 must be provided over the full length of need associated with that hazard.

The MASH TL3 point-of-need provides containment of a 2270kg pick-up truck travelling at 100km/h and 25 degrees. When anchored with MSKT terminals the MASH TL3 PON is the 3rd post of the end terminal.

The MASH TL4 point-of-need provides containment of a 10,000kg rigid truck travelling at 90km/h and 15 degrees.

The MASH TL4 leading point-of-need for RamShield® HC is 9.5m downstream of the asymmetric transition as shown in Figure 5.

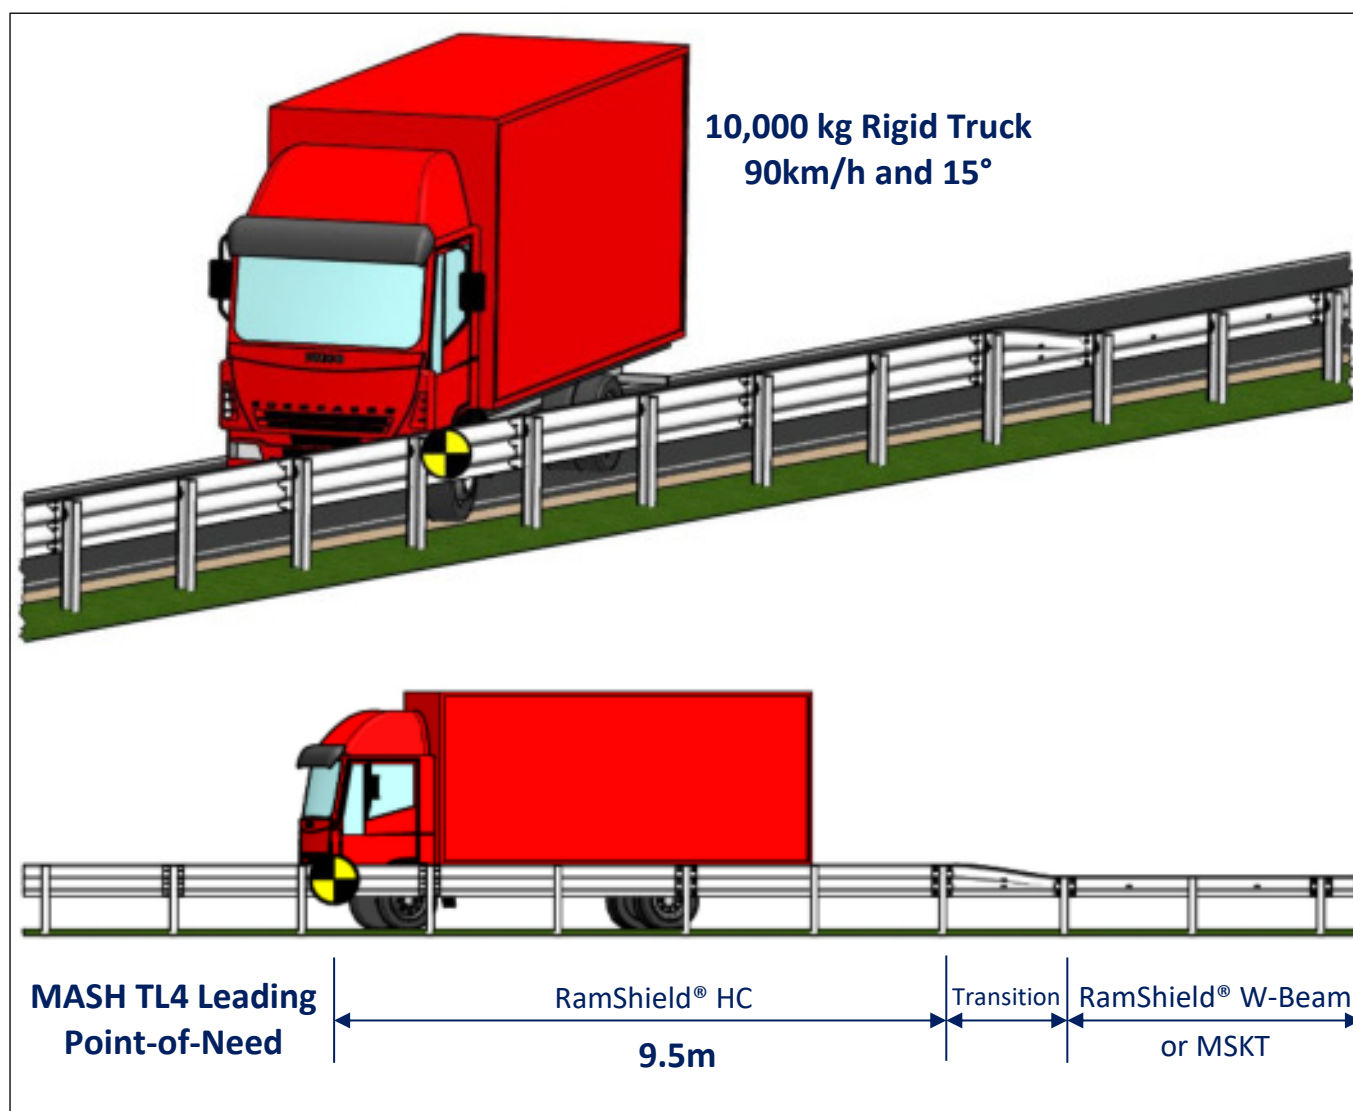


Figure 5: RamShield® HC MASH TL4 Point-of-Need

7.10 Minimum Installation Length

The crash tested lengths of RamShield® HC are not meant to reflect minimum installation lengths. It is a requirement under the MASH standard to crash test long installation lengths and minimise the influence of the end terminal in providing safe containment and redirection. This is regarded as 'worst case impact scenario'.

It is recommended, where space permits, to install continuous safety barrier rather than designing a barrier to shield a specific hazard(s). A continuous safety barrier aims to protect the entire roadside and prevent vehicle rolling, impacts with hazards or head-on collisions.

Where site conditions do not permit the use of long barrier sections, the recorded contact lengths with RamShield® HC providing safe vehicle containment and redirection were 12m for a MASH TL3 impact and 20m for a MASH TL4 impact.

7.11 Installation on Curves

Guardrail barriers perform well on the outside of curves, even those of relatively small radius, as the concave shape (in plan view) supports the development of tension in the thrie-beam rail.

In the field, straight sections of thrie-beam can be used to form a radius of 45m or greater. When a radius of less than 45m is required, the thrie-beam rails are required to be factory curved. For ordering purposes, the orientation of curvature (i.e. concave or convex) and the radius is required by the manufacturer.

Refer to Section 12.0 for guidance on measuring curvature.





8.0 RamShield® HC Component Identification



**1860mm RamShield®
HC Post
(24 kg each)**




M16 x 32mm Bolt



M16 x 50mm Bolt



M16 Oversize Nut

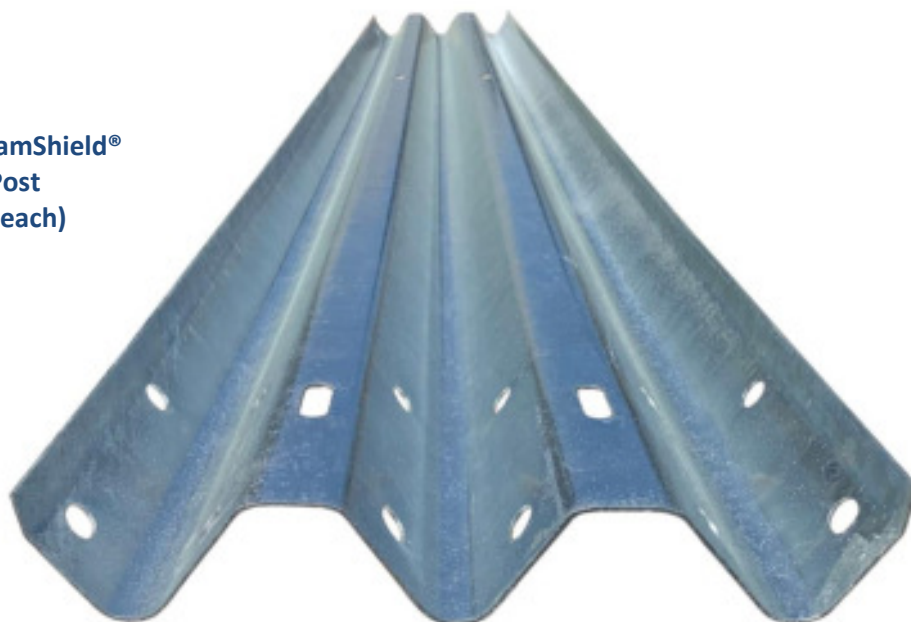

**4m Thrie-Beam Guardrail
(72kg each)**



**1.9m Asymmetric Transitions
(32kg each)**



9.0 Tools Required

Tools required for the installation of RamShield® HC are the same as those used for the installation of public domain three-beam barriers. This includes:

- Post driving equipment or auger;
- Air compressor;
- Pneumatic drill driver with 32mm attachment;
- Metal snips;
- String line;
- Tape measure;
- Hammer;
- 12mm diameter pinch bar; and
- Slings or chains.

9.1 Recommended PPE

It is recommended that the following personal protective equipment (PPE) be provided for the safe installation of RamShield® HC:

- Safety footwear;
- Gloves;
- Hearing protection;
- High visibility clothing; and
- PPE as required for the use of post driving equipment or auger.

10.0 Site Establishment

10.1 Traffic Control

Prior to the commencement of any work, the site should be evaluated for risks to workers, pedestrians and other road users. The establishment of traffic control should provide safe travel for passing vehicles and/or pedestrians and appropriately protect workers near the roadside.

10.2 Underground Services

The installation of RamShield® HC requires the supporting posts to be embedded into the ground. Prior to the installation of posts an investigation for potential underground hazards is recommended.

10.3 Overhead Obstructions

The site should be evaluated for potential overhead obstructions that may present a risk during the installation process. These obstructions typically include power lines, signage or trees.

10.4 Unloading Exclusion Zone

Only appropriate load-rated slings or chains should be used for safe unloading. It is recommended that an exclusion zone be maintained around the unloading process. This provides distance between moving machinery and workers in the event that goods or the machinery move unexpectedly.

Unloading and the storing of the product on a level surface is recommended. Storing product adjacent to the installation area eliminates the requirement for workers to carry items over long distances.



11.0 RamShield® HC Installation

The major steps in the installation of RamShield® HC are as follows;

- Set-out;
- Installing the leading terminal and asymmetric transition;
- Installing the C-posts;
- Attachment of the three-beam guardrail;
- Installing the trailing terminal and asymmetric transition.

11.1 Set-Out

It is recommended that a string line be used to establish the alignment of the post locations. When establishing the post locations, take care to note the following;

- RamShield® HC does not use offset blocks. The width of the system is just 230mm.
- The standard post spacing of RamShield® is 2.0m;
- The post spacing of the asymmetric transitions and MSKT terminals is 1.905m;
- The system width of RamShield® HC differs from the system width of RamShield® w-beam guardrail, MSKT terminals and bridge transitions.
- The RamShield® HC posts are not to be installed within the end terminal or w-beam region.



11.2 Post Installation

Potential Hazards: Use of post driving equipment or auger, contact with underground hazards, excessive noise, hand injury from pinch points and injury from movements and posture.

Recommended Control Measures: Observe the safe work instructions as per machinery requirements, ensure the area has been inspected for underground hazards, wear appropriate hearing protection, wear gloves and observe correct techniques when lifting (bend at the knees).

The posts may be installed by;

- Driving with an appropriate driving head to the required depth, approximately 890mm, or
- Auguring a minimum 200mm diameter hole approximately 890mm deep, placing the post in the hole and backfilling. The backfill material is to be placed in 150mm lifts and compacted with tamping equipment.

Once installed, the top of the post should measure 970mm above ground level.

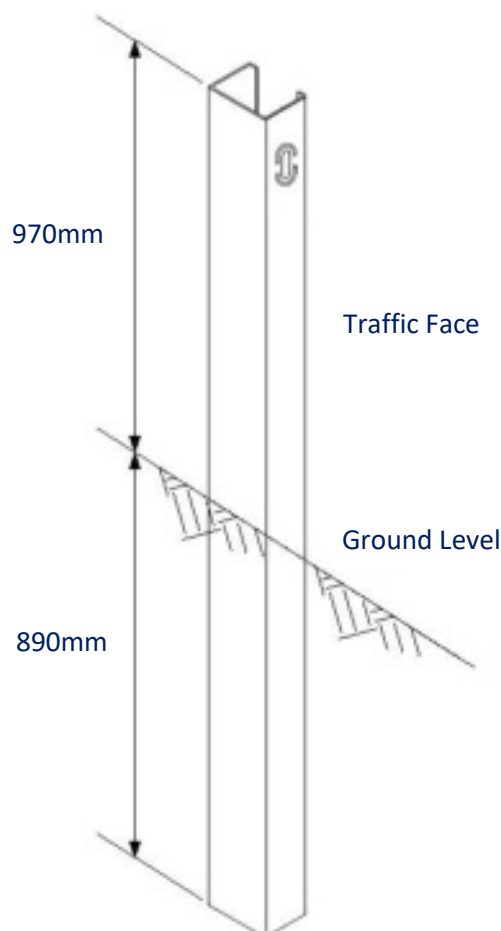


Figure 6: RamShield® HC Post Installation



11.3 Attaching the Thrie-Beam Rails

Potential Hazards: Injury from movements and posture, hand injury from pinch points, strain to wrists from tightening bolts and excessive noise from use of impact driver.

Recommended Control Measures: Observe correct techniques when lifting rails (bend at the knees), wear gloves, use a pinch bar to align holes, use an impact drill to tighten bolts and wear appropriate hearing protection.

Standard 4m thrie-beam guardrails are used throughout the RamShield® HC system. The rails are secured to the posts using a M16 x 50mm mushroom head bolt and oversize nut. The bolt passes through the upper slot in the thrie-beam rail. The nut is tightened using a 32mm attachment.

The thrie-beam lap is orientated so that the leading edge of the splice is shielded from the nearside approaching traffic. Rails are spliced together using twelve (12) standard M16 x 32mm mushroom head bolts and oversize nuts. The oversize nuts are tightened using a pneumatic drill driver and 32mm attachment.

The use of a pinch bar will assist in aligning the splice holes as the bolts are inserted. The use of a driving pin to elongate the splice holes is NOT permitted.

There is no torque requirement for the tightening of the post bolts or splice bolts. They should be tightened to a snug position.

Once secured to the posts, the finishing height of the thrie-beam will be approximately 30mm above the top of the posts.



Figure 7: Splice Arrangement

12.0 Curving of Thrie-Beam Rails

Thrie-beam guardrail barriers perform well on the outside of curves, even those of relatively small radius, as the concave shape (in plan view) supports the development of tension in the w-beam rail.

In the field, straight sections of thrie-beam can be used to form a radius of 45m or greater. When a radius of less than 45m is required, the thrie-beam rails are required to be factory curved.

For ordering purposes, the orientation of curvature and radius is required. Alternately, providing the chord length (C), the height of rise (H) or angle (ϕ) will allow Safe Direction to calculate the radius of curvature.

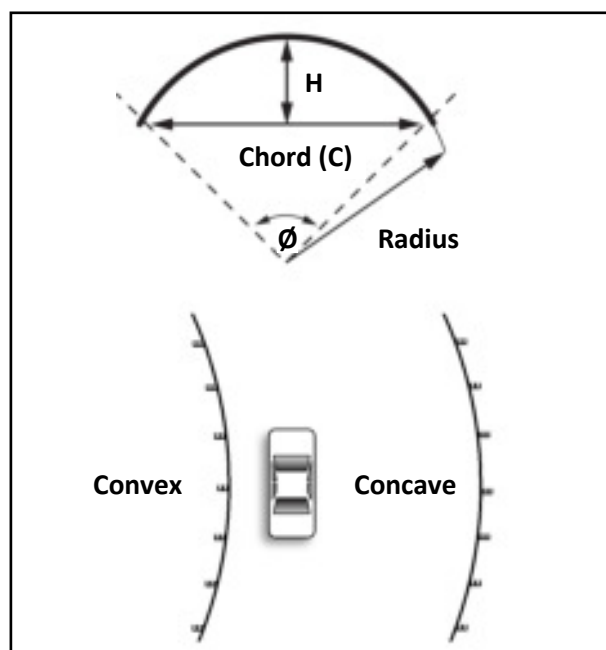


Figure 8: Curving Orientation



13.0 Installation Tolerances

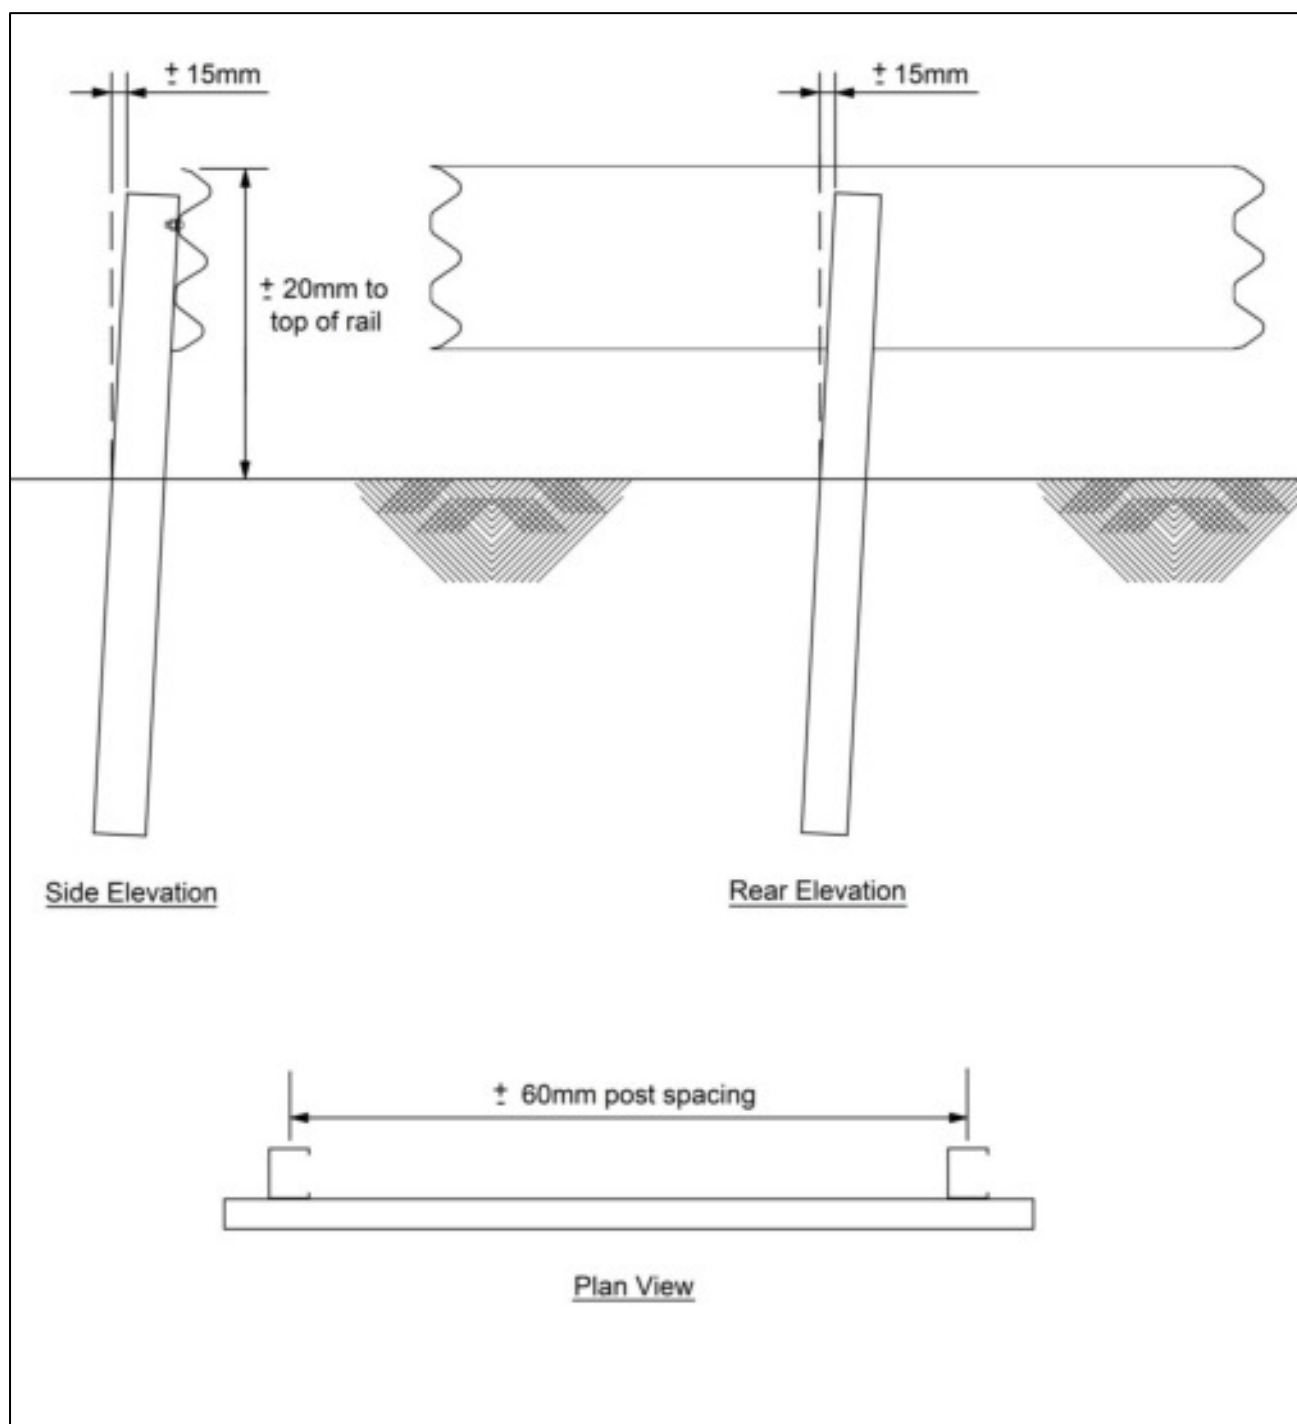


Figure 9: RamShield® HC Installation Tolerances



RamShield® HC Inspection Form

Inspection Date	
Client	
Project Reference	
Name of Inspector	
Company	

<input type="checkbox"/> Yes <input type="checkbox"/> No	The system is suitably anchored with approved state road agency end terminals.
<input type="checkbox"/> Yes <input type="checkbox"/> No	Asymmetric transitions are used to connect to w-beam guardrail.
<input type="checkbox"/> Yes <input type="checkbox"/> No	The posts are spaced at maximum 2.0m centres.
<input type="checkbox"/> Yes <input type="checkbox"/> No	The height measured to the top of the posts is 970mm \pm 20mm.
<input type="checkbox"/> Yes <input type="checkbox"/> No	The posts are correctly orientated with the release tab on the traffic side.
<input type="checkbox"/> Yes <input type="checkbox"/> No	The height measured to the top of the rails is 1000mm \pm 20mm.
<input type="checkbox"/> Yes <input type="checkbox"/> No	The rail is secured to each post with one (1) M16 x 50mm mushroom head bolt & oversize nut.
<input type="checkbox"/> Yes <input type="checkbox"/> No	The rails are spliced with twelve (12) M16 x 32mm mushroom head bolt & oversized nuts.
<input type="checkbox"/> Yes <input type="checkbox"/> No	The rail lap is orientated so that the leading edge of the splice is shielded from approaching traffic.
<input type="checkbox"/> Yes <input type="checkbox"/> No	All bolts are tightened.
<input type="checkbox"/> Yes <input type="checkbox"/> No	The fill material around the posts is suitably compacted.
<input type="checkbox"/> Yes <input type="checkbox"/> No	Any minor damage to the galvanised finish is repaired using two coats of an organic zinc rich paint.
<input type="checkbox"/> Yes <input type="checkbox"/> No	The area around the barrier is free of debris.

Comments/Notes



14.0 Maintenance

RamShield® HC is a low maintenance barrier. Except for repairs due to impacts, it is recommended that an annual inspection be undertaken to assess the following:

- Debris has not accumulated around the barrier which may impede the function of the barrier;
- Vegetation around the barrier is appropriately maintained;
- Nuisance impacts have not gone undetected; and
- The anchor assembly at the end terminals is taut and the bearing plate is correctly aligned.

15.0 Repair

In the event of a vehicle impact, damage to the barrier is to be assessed in accordance with Table 3. Typically, impacts with RamShield® HC will require replacement of damaged sections of rails and posts. It is also recommended that new bolts be used where rails and posts have been replaced.

Additional tools required for repair include:

- Acetylene torch to cut away damaged rail;
- Heavy duty chain to remove damaged posts;
- Sledge hammer; and
- Post extractor.

Similar to the installation sequence, it is recommended that the guidelines contained in Section 10.0 be observed in the establishment of traffic control and an unloading exclusion zone in addition to investigation for underground services and overhead obstructions.

15.1 Removal of Damaged Posts

Potential Hazards: *Hand injury from pinch points, hand injury from damaged edges and injury from sudden movement as the posts are released.*

Recommended Control Measures: *Wear gloves and maintain an appropriate exclusion zone around the post until removed.*

Damaged posts should be removed using an appropriate post extractor. Once the damaged post is removed, the ground material should be suitably compacted before a replacement post is installed.

15.2 Removal of Damaged Rails

Potential Hazards: *hand injury from pinch points, hand injury from damaged edges, injury from sudden movement as rails are released and excessive noise from use of impact drill.*

Recommended Control Measures: *Wear gloves and wear appropriate hearing protection.*


Using an impact drill, remove the splice bolts at the rail connection. Rails that have twisted or bent during impact may need to be cut into manageable sections using an acetylene torch.


Table 3: Damage Assessment Guidelines

Type of Damage	Description of the Damage	Remedial Action
Damage to the galvanised coating on the posts.	The sum total of the damaged area does not exceed 70cm ² (0.5% of the total surface area) and no individual damaged area exceeds 40cm ² .	An organic zinc rich paint is to be applied to the repair area in two coats.
	The sum total of the damaged area exceeds 70cm ² (0.5% of the total surface area) or an individual damaged area exceeds 40cm ² .	The post is to be replaced.
Damage to the galvanised coating on the rails.	The sum total of the damaged area does not exceed 250cm ² and no individual damaged area exceeds 40cm ² .	An organic zinc rich paint is to be applied to the repair area in two coats.
	The sum total of the damaged area exceeds 250cm ² or an individual damaged area exceeds 40cm ² .	The rail is to be replaced.
Damage to the posts.	The post is bent.	The post is to be replaced.
Damage to the post tab.	The post tab has distorted and released the post bolt.	The post is to be replaced.
Damage to the rails.	The rail is dented, twisted or flattened.	The rail is to be replaced.
	There are nicks in any part of the rail.	
	The slots in the rail are distorted.	
Damage to bolts.	The body of the bolt is distorted.	The bolt is to be replaced.
	The thread of the bolt is damaged.	
Disturbance of material around the posts.	The material around a post is loose.	The material is to be suitably compacted.

BILL OF MATERIALS



ITEM	DESCRIPTION
1	1860MM RAMSHIELD HIGH CONTAINMENT POST
2	THRIEBEAM GUARDRAIL
3	M16 x 50mm POST BOLT & OVERSIZE NUT
4	M16 x 32mm SPLICE BOLT & OVERSIZE NUT

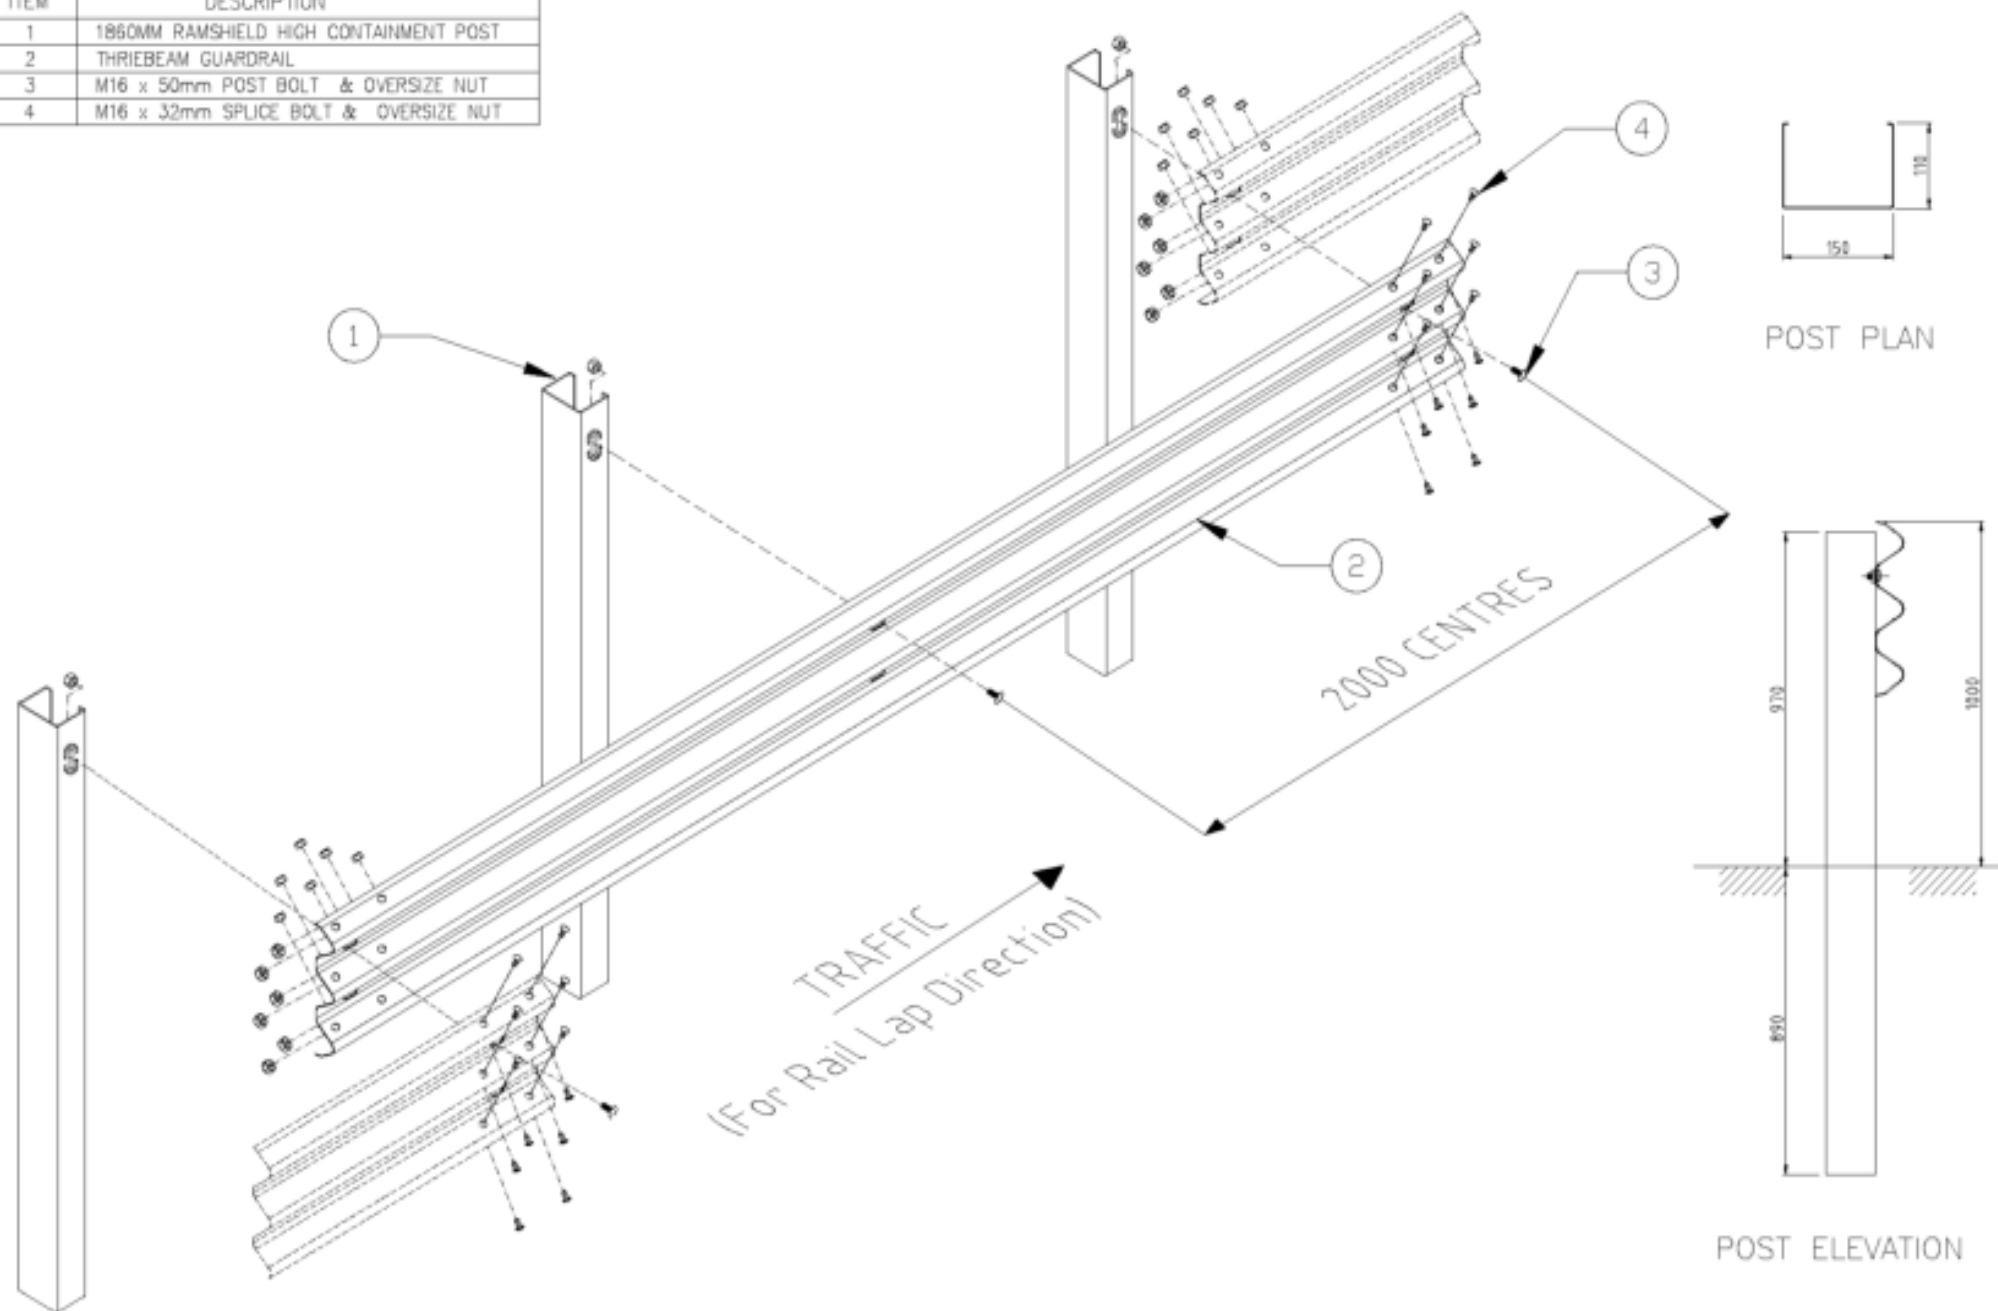

REV	DATE	DESCRIPTION	DRAWN	APPROD	REV	DATE	DESCRIPTION	DRAWN	APPROD
A	08-12-20	INITIAL ISSUE	HS	TC					





DRAWING DESCRIPTION	Ramshield High Containment Assembly. MASH Test Level 4 Compliant			
DRAWING REFERENCE	GR-TB-001	DRAWN BY	H. SEAL	DIMENSIONS
		CHECKED	H. WALLACE	SCALE
		APPROVED	T. COLSBOURN	mm
				HTS

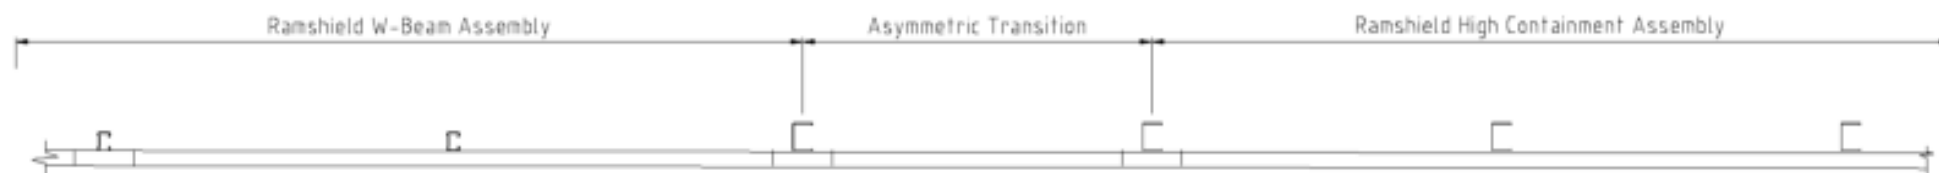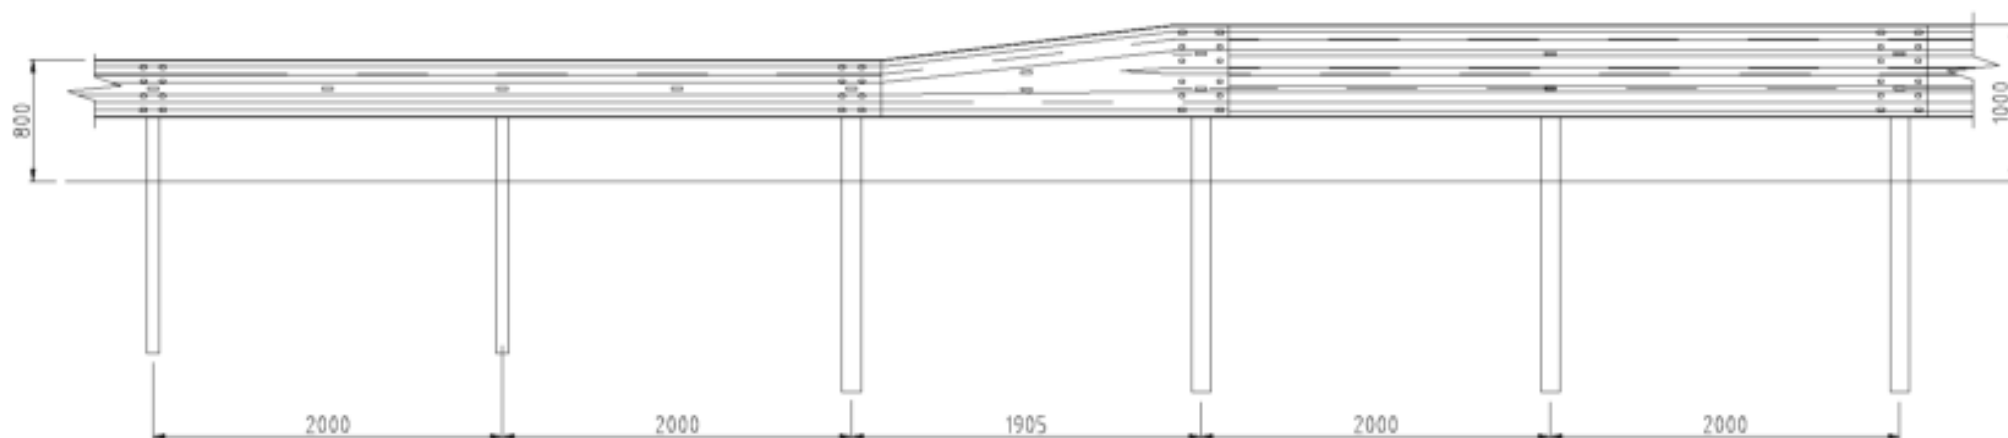**PLAN VIEW****ELEVATION VIEW****NOTES:**

1. Ramshield W-Beam is compliant with MASH Test Level 3
2. Ramshield High Containment is compliant with MASH Test Level 4
3. Ramshield High Containment posts are to be installed within the asymmetric transition.

<div>REVISIONS</div> <table><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td>A</td><td>11.08.09</td><td>INITIAL ISSUE</td><td>HS</td><td>TC</td></tr></table>																									A	11.08.09	INITIAL ISSUE	HS	TC	<div>REVISIONS</div> <table><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td>REV</td><td>DATE</td><td>DESCRIPTION</td><td>DRAWN</td><td>APPROD.</td></tr></table>																									REV	DATE	DESCRIPTION	DRAWN	APPROD.	<div>SAFE DIRECTION</div> 					<div>DRAWING DESCRIPTION</div> <div>Ramshield High Containment Connection to Ramshield W-Beam Assembly</div>																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
A	11.08.09	INITIAL ISSUE	HS	TC																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
REV	DATE	DESCRIPTION	DRAWN	APPROD.																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
<div>DRAWING REFERENCE</div> <div>GR-TB-002</div>																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
					DRAWN BY				H. SEAL		DIMENSIONS		mm																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
					CHECKED				H. WALLACE		SCALE		NTS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										

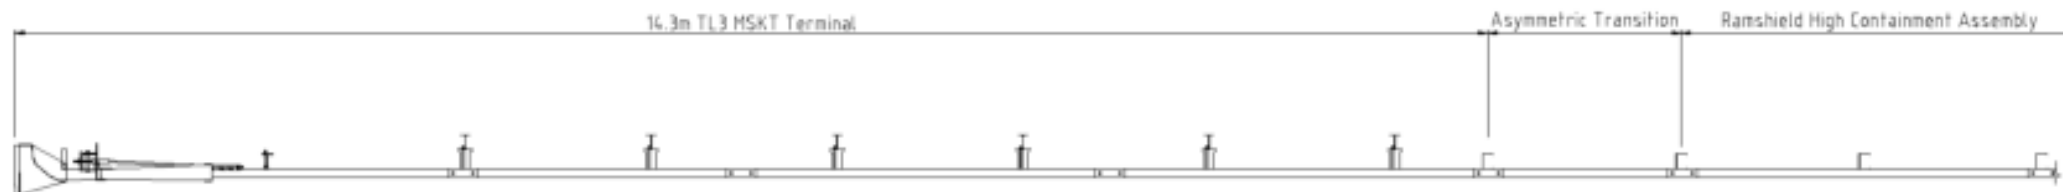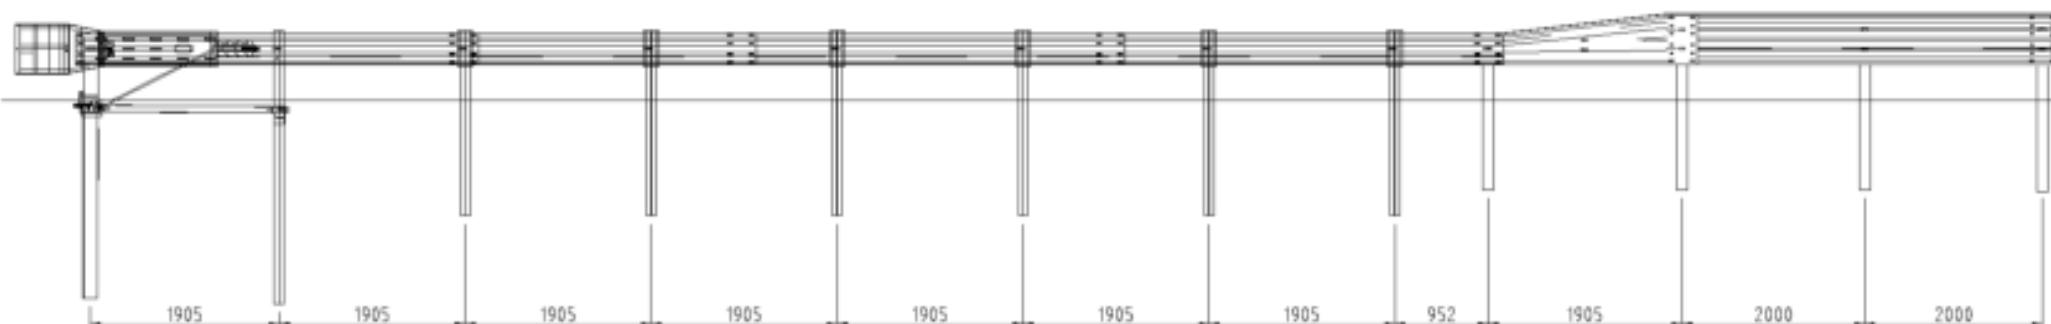**PLAN VIEW****ELEVATION VIEW****NOTES:**

1. The MSKT is compliant with MASH Test Level 3
2. Ramshield High Containment is compliant with MASH Test Level 4
3. Ramshield High Containment posts are to be installed within the asymmetric transition.

<div>REVISIONS</div> <table><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td>A</td><td>08.12.20</td><td>INITIAL ISSUE</td><td>HS</td><td>TC</td></tr></table>															A	08.12.20	INITIAL ISSUE	HS	TC	<div>REVISIONS</div> <table><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr></table>																				<div> SAFE DIRECTION</div>		<div>DRAWING DESCRIPTION</div> <div>Ramshield High Containment Connection to MASH SKT Terminal</div>			
A	08.12.20	INITIAL ISSUE	HS	TC																																									
<div>DRAWING REFERENCE</div> <div>GR-TB-003</div>					<div>DRAWN BY</div> <div>H. SEAL</div>		<div>H. SEAL</div>		<div>DIMENSIONS</div> <div>mm</div>																																				
					<div>CHECKED</div> <div>H. WALLACE</div>		<div>H. WALLACE</div>		<div>SCALE</div> <div>NTS</div>																																				
					<div>APPROVED</div> <div>T. COLEBURN</div>																																								



SafeDirection

CRASH BARRIER SOLUTIONS



Safe Direction Pty Ltd

5 Simpson Close, Smeaton Grange NSW 2567 Australia

Ph: 1300 063 220 | E: sales@safedirection.com.au

safedirection.com.au

ABN 53 156 459 684