

Product Data Sheet

MSKT Guardrail End Terminal

Last Updated: September 2023


Containment Level	MASH TL3
Impact Condition	2270 kg pick-up truck, 100km/h
System Length	14.3 m
Post Spacing	1.905 m centres
Quantity of Posts	8 off
Point of Need	Post #3
Maximum Allowable Flare Offset	600 mm
System Mass	555 kg
Containment Level	MASH TL2
Impact Condition	2270 kg pick-up truck, 70km/h
System Length	9.5 m
Post Spacing	1.905 m centres
Quantity of Posts	5 off
Point of Need	Post #3
Maximum Allowable Flare Offset	300 mm
System Mass	410 kg
System Height	800 mm
System Width	435 mm
System Finish	Hot dip galvanized




Product Data Sheet

MSKT Guardrail End Terminal

TL3 Configuration

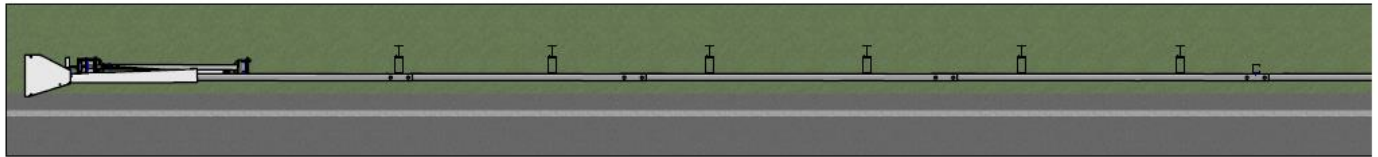


PLAN VIEW

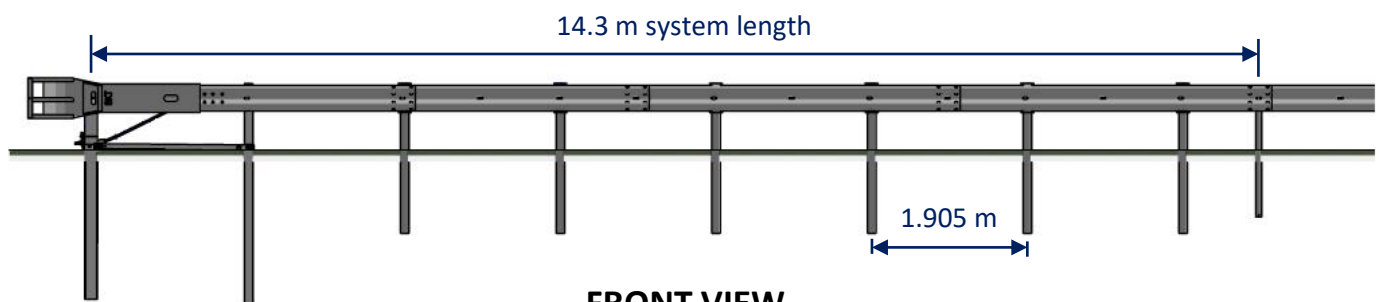


FRONT VIEW

TL2 Configuration

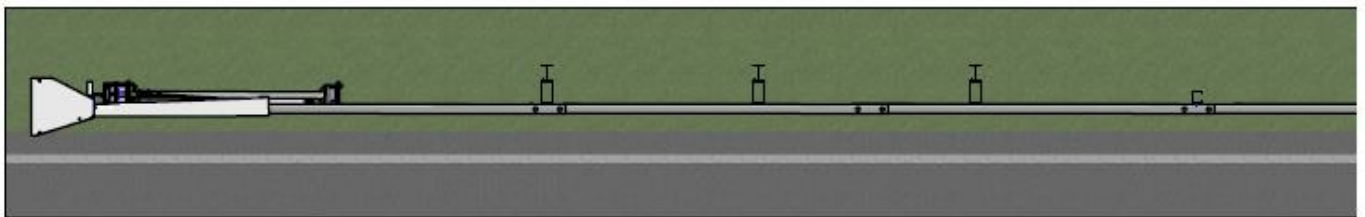

PLAN VIEW

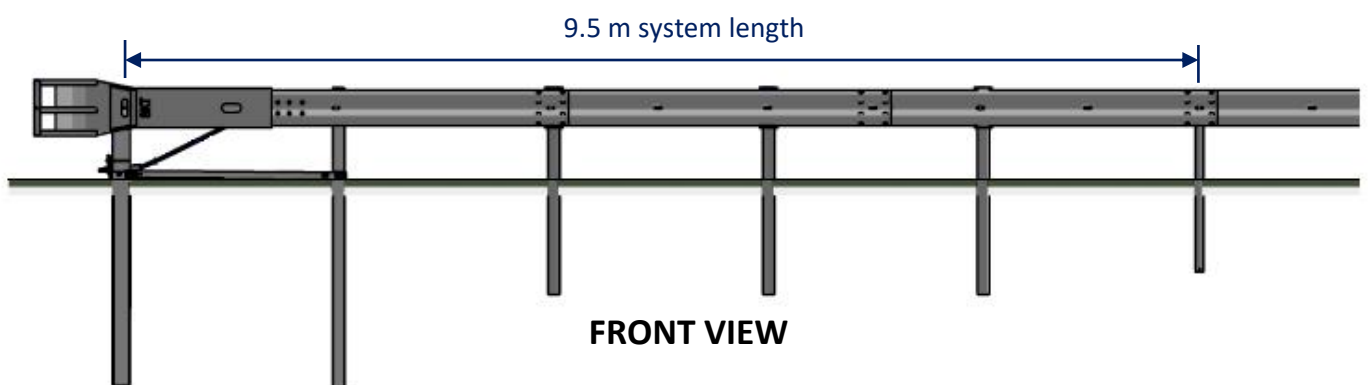

FRONT VIEW