

Product Data Sheet

TAU-M Crash Cushion

Last Updated: September 2023


Containment Level	MASH TL3
Impact Condition	2270 kg pick-up truck, 100km/h
Classification	Non-gating, fully re-directive
System Length	6.93 m
System Height	830 mm
System Width	877 mm
Max. Hazard Width	762 mm
System Mass	1135 kg
System Finish	Hot dip galvanized
Ground Surface	Concrete or Asphalt
Number of Anchors	25 off M20 (concrete), 53 off M20 (asphalt)
Containment Level	MASH TL2
Impact Condition	2270 kg pick-up truck, 70km/h
Classification	Non-gating, fully re-directive
System Length	4.33 m
System Height	830 mm
System Width	877 mm
Max. Hazard Width	762 mm
System Mass	770 kg
System Finish	Hot dip galvanized
Ground Surface	Concrete or Asphalt
Number of Anchors	25 off M20 (concrete), 53 off M20 (asphalt)




Product Data Sheet

TAU-M Crash Cushion

TL3 Configuration

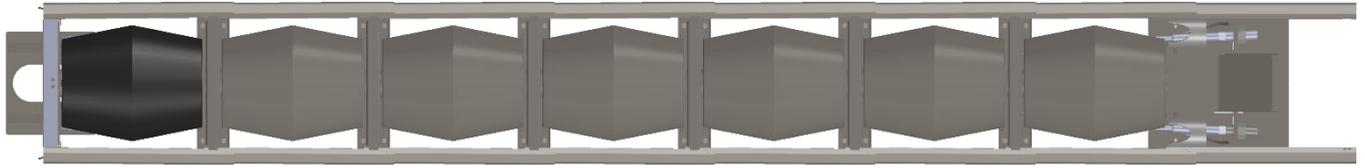


PLAN VIEW

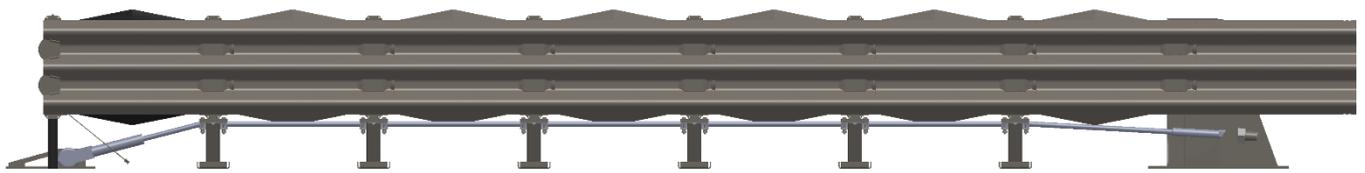

6.93 m system length


FRONT VIEW

TL2 Configuration

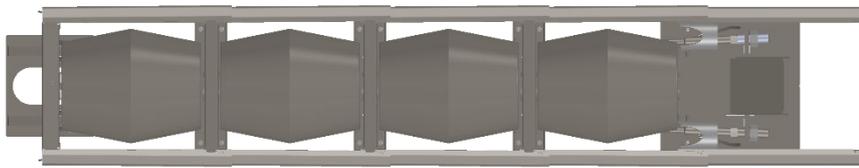

PLAN VIEW

UP TO 762 mm
MAX. HAZARD WIDTH

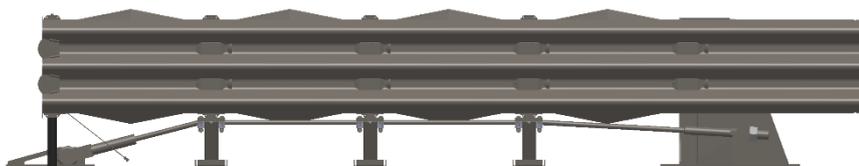

4.33 m system length

FRONT VIEW

